



## PRODUCT SPECIFICATION

# ZwitterCo Z-Clear™ 8-inch Elements



## The Membrane That Unlocks Fats, Oils, Grease, and Protein Separations


Z-Clear™ membranes show unprecedented fouling resistance and can be fully restored without harsh chemicals, resulting in lower operating costs, fewer membrane replacements, and less downtime.

### Product Class: Superfiltration

#### How We're Different:

- 1000+ mg/L tolerance of oil and grease
- Extreme tolerance for chlorine, peracetic acid, and other cleaning chemicals
- Clean in under one hour

Specific fluid testing recommended prior to use. Please contact our technical services team to explore unique opportunities with your water.

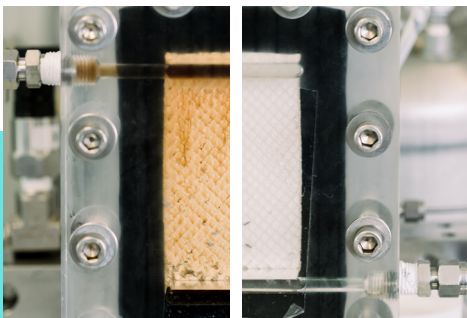

## Reduce wastewater and chemical use in your operations

Contact us to learn more about our solutions or to try our products in your facility.


[zwitterco.com](http://zwitterco.com) | (301) 442-5662 | [sales@zwitterco.com](mailto:sales@zwitterco.com)

## ZwitterCo Z-Clear™ 8-inch Elements


### OPERATING SPECIFICATIONS:

Parameter	Imperial units	SI units
Max operating pressure	220 psi	15 bar
Max pressure drop (per element)	15 psi	1 bar
Max pressure drop (per housing)	30 psi	2 bar
Active area	296 ft <sup>2</sup>	27.5 m <sup>2</sup>
Permeate flow	1.0 - 3.6 GPM	0.2 - 0.8 m <sup>3</sup> /hr
Feed flow rate	40 - 110 GPM	9 - 25 m <sup>3</sup> /hr
Operating temperature	40 - 105 °F	5 - 40 °C
Operating pH	2 - 12	

### Z-CLEAR™ ELEMENT DIMENSIONS

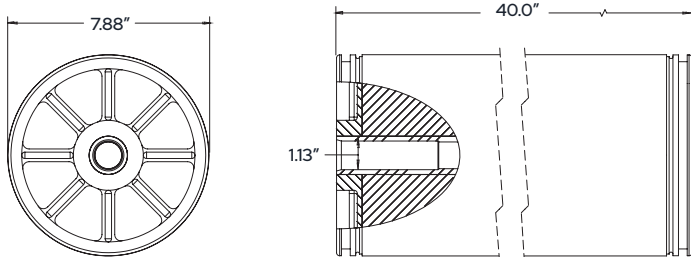

### Z-CLEAR™ REJECTION CURVE

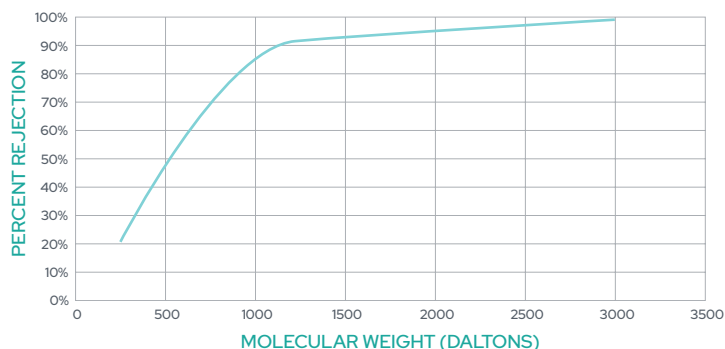

Excellent rejection of organics larger than 1 nanometer (~1,000 daltons) with minimal rejection of salts

ZwitterCo is an industrial membrane provider enabling next-generation resource recapture and water treatment solutions.

ZwitterCo  
85 Bolton Street  
Cambridge, MA 02140  
(301) 442-5662

Contact Us  
zwitterco.com  
sales@zwitterco.com